


HD Vari-Focal (15-50mm)


YV3.3x15SA-SA2

3.3x Applicable camera (model) 1 2/3 1/2 1/3 1/4 For Security

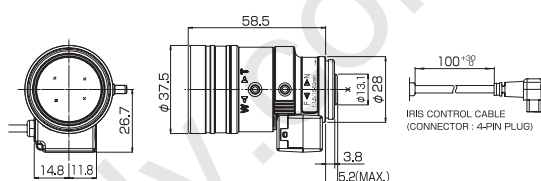

Unit : mm

YV3.3x15SA-SA2			
Focal Length (mm)			15 - 50 (3.3x)
Iris Range			F1.5 - T360(Equivalent to F360)
Operation	Zoom		Manual
	Focus		Manual
	Iris		Auto (DC type)*1
Angle Of View (H×V)	1/3"	WIDE	18°08' × 13°34'
		TELE	5°35' × 4°12'
	1/4"	WIDE	13°34' × 10°10'
		TELE	4°12' × 3°10'
Angle Of View (H×V)	1/3"	WIDE	19°46' × 11°40'
Aspect Ratio 16 : 9	1/4"	TELE	6°04' × 3°26'
		WIDE	14°47' × 8°18'
		TELE	4°34' × 2°35'
Focusing Range (From Front Of The Lens) (m)			∞ - 0.8
Object Dimensions at M.O.D. (H×V) (mm)	1/3"	WIDE	271 × 202
		TELE	87 × 66
	1/4"	WIDE	202 × 151
		TELE	66 × 49
Object Dimensions at M.O.D. (H×V) (mm)	1/3"	WIDE	296 × 165
		TELE	95 × 54
	1/4"	WIDE	220 × 123
		TELE	72 × 40
Back Focal Distance (in air) (mm)			MIN.7.7
Exit Pupil Position (From Image Plane) (mm)			-36
Filter Thread (mm)			-
Mount			CS
Mass (g)			60
Coil Resistance			Drive Coil 190Ω Damping Coil 500Ω
Current Consumption			23mA(Max.) at DC 4V
Remarks			•With Metal Mount (*1) When power is turned off, iris will automatically close. YV3.3×15SA-SA2L : Long Cable Type(230mm)

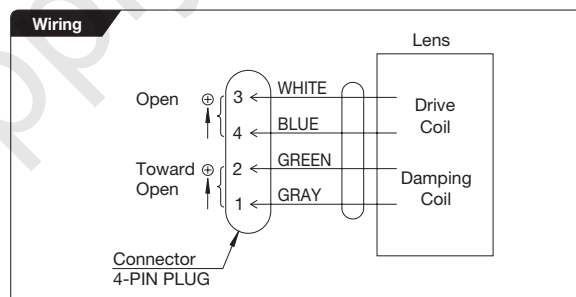

[Lens Image]

